

CATALOGUE



FOLDING DOORS & WALLS





Aporta loves space

Aporta has been a trendsetter and market leader in Belgium for folding doors for more than 30 years. For 30 years, we have been driven to give our folding door the right look and feel in all its functionality. Thanks to strong innovation, the Aporta folding door fulfils all your living needs more than ever. Exceptionally high-quality and durable. Space-saving. Exceptionally beautiful in any interior.

An attractive and smart solution

With an Aporta folding door, you create more space to move around in. Our high-quality folding doors fit perfectly in places where there is not enough space for a classic door. They have no turning circle and take up almost no space when opened.

Hexibility is key

Our folding doors are the perfect solution for dividing up a large room into smaller areas or for separating a hall, dining room or washing room. Using a folding door as a wall solution maximises the available space in your home. Slide the folding wall open and you have a beautiful passage without sacrificing space. Close the door and enjoy peace, privacy and cosiness.

Beautiful in every interior

Be surprised by the creative possibilities of our folding doors. Espacially for applications in projects such as care centres, schools and other buildings with a semi-public function. We design modern folding doors that have their place in really any interior: classic, modern, colourful,... whatever you want.



An Aporta folding door has several attractive assets that make it preferable to classic doors.

We make our folding doors **100% custom-made**. They are simple to assemble, easy to use and maintenance-free. They are durable as they are made of quality materials. They are not subject to humidity or temperature, and they are also scratch-resistant and washable.

The acoustic properties are also excellent, as the wavy surface filters sound. This makes the folding doors ideal for meeting rooms.

Small- and large-scale projects

Aporta is experienced in manufacturing, supplying and installing folding doors for small, medium and large-scale building projects. We think along with you in the design phase and ensure flawless installation according to your project schedule.







Super strong on the inside, sophisticated on the outside

Strong construction

Aporta has developed its own inner frame for its folding doors. This rock-solid but light, flexible and movable skeleton forms the basis of this quality product. The welded construction in stainless steel guarantees sturdiness and a long service life. That is why we provide a 10-year guarantee on the interior without any worries.

Refined finishing

The interior is finished with synthetic leather. The high-quality and easy-care artificial leather skin is available in a whole range of colours. You even have the option of choosing a different colour for the two sides. The folding doors therefore fit into any interior.


Smooth movement

Industrial ball bearing wheels ensure a smooth folding movement and folding magnets keep the leather folds nicely bundled. This is a hanging and floating system: no door frames are needed and a floor track is also unnecessary. So you can hang a folding door anywhere, while leaving the floor completely free.


Various versions possible

DOOR TYPES


We offer our doors in different configurations. Handy, right?




Type 1



Type 2



Type 3



Type 4


RAIL TYPE

An Aporta folding door can be fixed in two ways:

- 1. The rail is fixed against the top of the opening (rail type A)
- 2. The rail is built into the ceiling (rail type B)

All finishing profiles are made of aluminium.

The space between the door and the floor is about 7 mm.

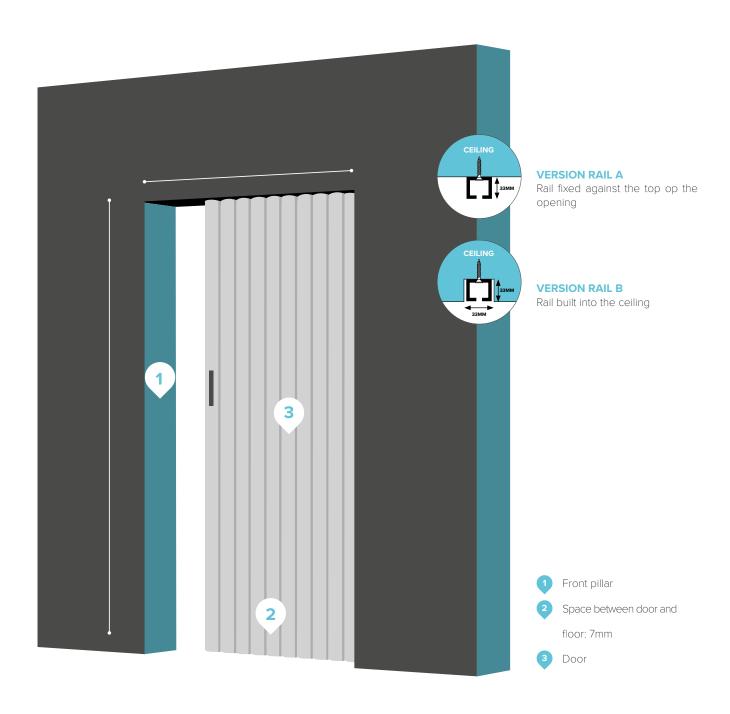

COLOURS

Pick your colour! Which colour suits your interior?

The front and back side in another colour? That's also possible with Aport Folding Doors!


Classic




Trendy*



Flashy*

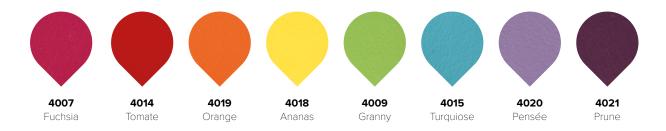

An up-to-date overview of the **end-of-stock colors** can be found on our website.

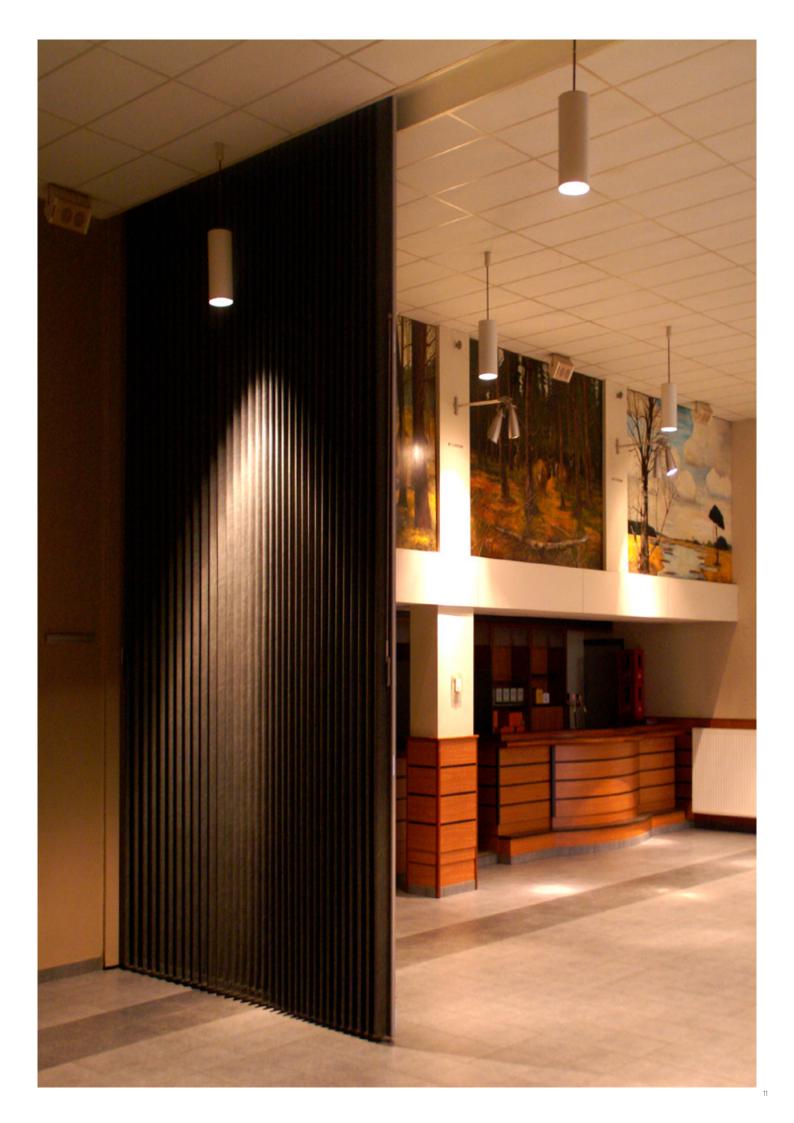

Personalise your folding door with numerous options

Following options provide even more comfort:

Chrome handles (1)

A shiny chrome handle in stead of an aluminium look

Cylinder lock (2)

A key on both sides of the door

Additional footstop (3)

For doors starting from 10 folds, the inside magnet is replaced by an external footstop by default

Internal folding magnets

Open and close the door in all positions, without the use of a footstop

• Trailing edge above or below in the same color as the door (4)

A trailing edge above is only possible with option rail B

Coloured profiles and handles (5-7)

Choose black (RAL 9005) or white (RAL 9010) in stead of an alumiminium look by default.

Soundproofing

Our airborne soundproofing is dependent of the composition:

- Single layer of artificial leather on both sides + trailing edge below: 19 dB
- Double layer of artficial leather on both sides + trailing edge below: 21 dB

^{*}Reports on our acoustic values are available on request.
















Technical information

PACKAGE THICKNESS A

Standard thickness: 225 mm Thickness with isolation: 240 mm



PACKAGE THICKNESS B

(Number of folds x 25 mm) + 110 mm

WIDTH OPENING	NUMBER OF FOLDS	PACKAGE THICKNESS B
0000 - 0740 mm	4	210 mm
0741 - 0905 mm	5	235 mm
0906 - 1070 mm	6	260 mm
1071 - 1235 mm	7	285 mm
1236 - 1400 mm	8	310 mm
1401 - 1565 mm	9	335 mm
1566 - 1730 mm	10	360 mm
1731 - 1895 mm	11	385 mm
1896 - 2060 mm	12	410 mm
2061 - 2225 mm	13	435 mm
2226 - 2390 mm	14	460 mm
2391 - 2555 mm	15	485 mm
2556 - 2720 mm	16	510 mm
2721 - 2885 mm	17	535 mm
2886 - 3050 mm	18	560 mm
3051 - 3215 mm	19	585 mm
3216 - 3380 mm	20	610 mm
3381 - 3545 mm	21	635 mm
3546 - 3710 mm	22	660 mm
3711 - 3875 mm	23	685 mm
3876 - 4040 mm	24	710 mm
4041 - 4205 mm	25	735 mm
4206 - 4370 mm	26	760 mm
4371 - 4535 mm	27	785 mm
4536 - 4700 mm	28	810 mm
4701 - 4865 mm	29	835 mm
4866 - 5030 mm	30	860 mm
5031 - 5195 mm	31	885 mm
5196 - 5360 mm	32	910 mm
5361 - 5525 mm	33	935 mm
5526 - 5690 mm	34	960 mm
5691 - 5855 mm	35	985 mm
5856 - 6020 mm	36	1010 mm


Installation manual



INSTALLATION FOLDING DOOR

Follow this instruction manual for a correct placement of your folding door!

ASSEMBLY PARTS IN THE PACKAGE

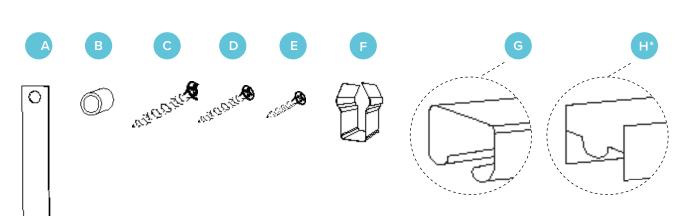

- A Steel plate
- B Plastic tubes
- Wood screw Ø 4 mm x 35 mm
- Wood screw Ø 4 mm x 25 mm
- Wood screw Ø 3 mm x 20 mm
- F Clips
- G Top rail
- Female profile or H profile (the female profile is allready assembled for folding door type 3)





Extra help?

Watch the installation video of the folding door here.



INSTALLATION TOP RAIL

- Mark where the door should go in the doorway. Draw a pencil line around it. This is where the door will be mounted against the walls and ceiling.
- 4 Hold the top rail against the ceiling at the level of the pencil line and mark dots where the top rail has holes. The side of the top rail where the holes are closer together will be on the side of the wall where the door package hangs.
- Make a small bore of max 2.5 mm diameter at the marked dots.
- Remove the small aluminium profile mounted in the folding door. This profile is fitted to prevent damage during transport. You will no longer need this profile to continue the assembly of the door.
- Do not move the door and keep the door in identical position.

 Carefully slide the long top rail into the door in the same position as the small piece.
- 6 Place the door straight with the top rail facing up and the handle on the side where you wish to open and close the door.
- 7 Put the door in the doorway. The door is self-supporting and may remain straight for a short time.
- Take the wood screws **D** and screw the top rail into the ceiling. Start with the ends. Meanwhile, you can move the door to clear the other holes.

INSTALLATION CLIPS

- 9 Rectangular openings are provided in the steel profile at the back of the door. Take the measurement from the ground to the centre of the rectangular opening.
- 10 Put a pencil mark on the wall at the same height. Do this for all rectangular openings.
- Make a small bore of max 2.5 mm diameter at the marked dots.
- Place the clips in steel on the marked dots with the D wood screws. Place the clips vertically.
- 13 Check if the clips are nicely aligned and vertical.
- 4 ATTENTION! With folding doors up to 9 folds, the inside magnet at the front of the door must (!) be nicely aligned with the back of the door. This prevents the inner magnet from permanently folding and damaging the synthetic leather when pushing the folding door package onto the clips!

Place the door package against the clips and do an additional check on the position of the clips in relation to the openings. (They should be nicely inside the U-profile.) Check at the back of the door that they are inside the U-profile. Then press the door at the top and then at the bottom until the door fits against the wall everywhere.

INSTALLATION FEMALE PROFILE

- Take the female profile and place it on the last open side of the opening. Take the direction of the profile into account. The 2 large round openings in the profile should be at the same height as the magnet in the folding door.
- Mark the holes in the profile on the wall.
- Make a small bore of max 2.5 mm diameter at the marked dots.
- Place the female profile with wood screws **E**. The 2 large round openings are not placed with a screw. In case of a folding door with lock, first press the lock hook into the female profile before attaching the female profile.
- Insert the 2 plastic tubes B into the 2 large round openings.
- 20 Take the steel plate A with 2 bores and place the plate with the 2 C wood screws.

Your Aporta folding door is now ready for use!



HOOFDZETEL

Prins Albertlaan 65 8870 Izegem T +32 (0)51 31 93 94 www.aporta.be

Aporta Vouwdeuren

